




4-Way Rack Assembly Instructions

Chrome #28102, 28103, 28104, 28108, 28113, 28114, 28115
Black #28110, 28111, 28112

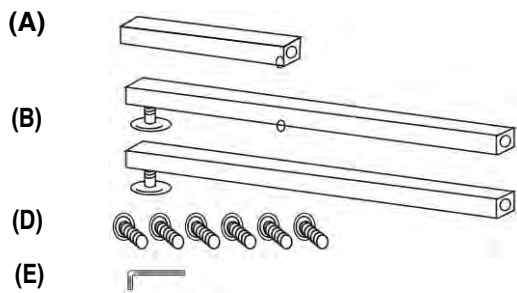

PARTS LIST Base Assembly

- (A) 1- 8 inch spanner bar
- (B) 2- 21-1/2 inch base bar w/leveler
- (C) 2- 47 inch uprights
- (D) 6- Bolts (removed from spanner bar and base bars)
- (E) 1- Allen wrench
- 4- Adjustable Rack Arms (not shown)

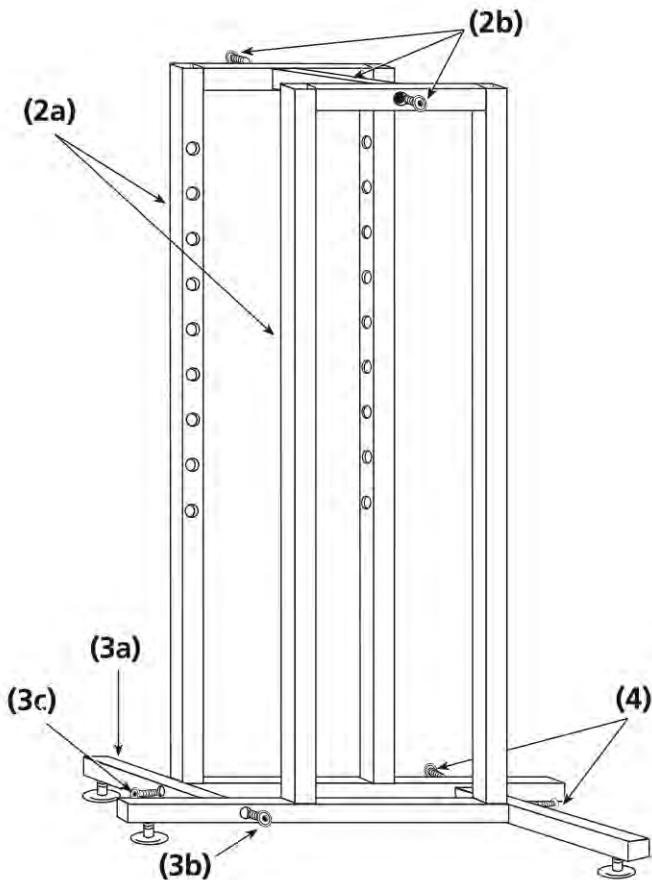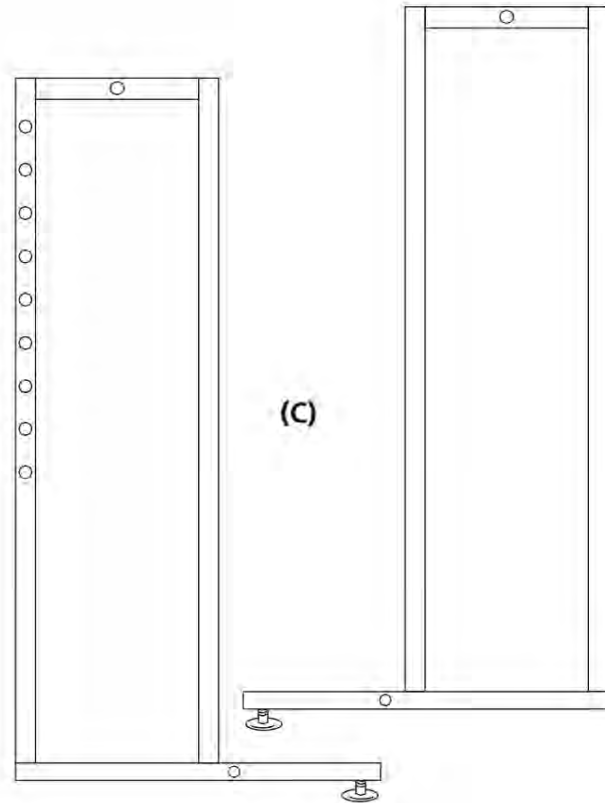

INSTRUCTIONS

- (1) Remove all bolts from spanner bar (part A) and base bars (part B).
- (2a) Place the two uprights (part C) with the legs facing in opposite directions and with the button holes for the arms facing inside (toward the other upright).
- (2b) Place the spanner bar (part A) between the top of the two uprights and attach with two of the bolts (part D).
- (3a) Position the base bar (part B) with the leveler toward the bottom.
- (3b) Attach the end of one of the base bars to the middle of the upright with one of the bolts
- (3c) Place a second bolt through the middle of the base bar and attach to the end of the other upright
- (4) Attach the other base bar on the other side of the uprights in the same manner.
- (5) When all parts are attached, tighten all 6 bolts.

Slide in arms (pushing buttons) to desired height.