

DOOR INSTALLATION FOR FRONT OPENING CASES


(Fig. A)
When installing, note location of door pulls. They must be positioned to the far left, and far right of showcase. Once installed doors will slide past each other, overlapping slightly in the middle.



(Fig. B) Locate door track at top of showcase.
Note there are two slots: a front slot and a back slot.



(Fig. C) Locate door track at bottom of showcase.
There are two rails: a front rail and a back rail.

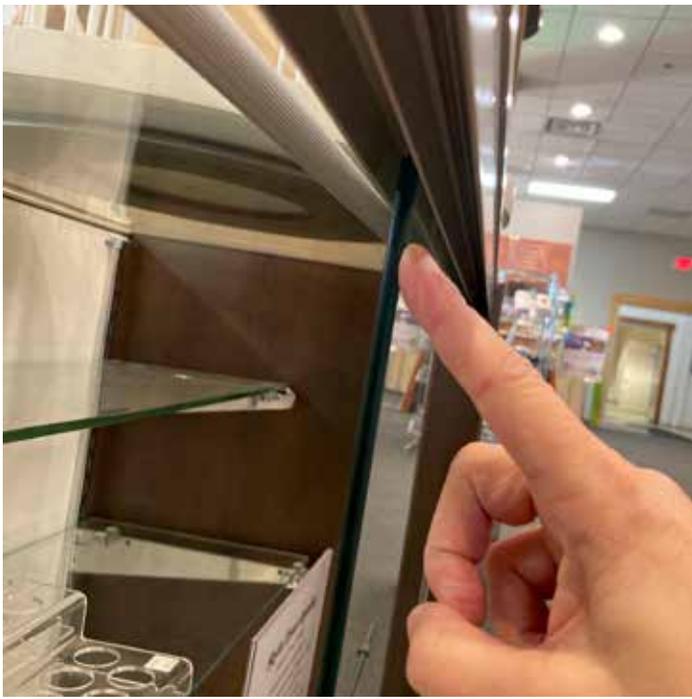

STEP 1

Locate right-hand door panel (door pull will be on the right, see Fig. A for reference)

Holding glass door with two hands, lift top of door into the BACK slot at the top of the showcase. Lift until top of glass touches top of slot.



STEP 2

While door panel is still lifted inside of BACK track, swing bottom of panel towards showcase until wheels are positioned over the BACK RAIL, then lower door gently so wheels are resting on the rail.

Door should now slide left and right along rail. If it does not glide smoothly, lift door upwards and reposition so wheels are in the correct position on the rail.



STEP 3

Repeat STEP 1 using the left-hand door and FRONT slot.

Holding glass door with two hands, lift top of door into the FRONT slot at the top of the showcase. Lift until top of glass touches top of slot.



STEP 4

Repeat STEP 2, and while door panel is still lifted, swing bottom of panel towards showcase until wheels are positioned over the FRONT RAIL, then lower door gently so wheels are resting on the rail.

Door should now slide right and left along rail.